


# Pro-XMP

Services Inc.  
**DEMTECH**<sup>®</sup>

## MEDIUM OUTPUT EXTRUSION WELDER

PRODUCTION WELDING OF GEOMEMBRANES AND RIGID THERMOPLASTICS

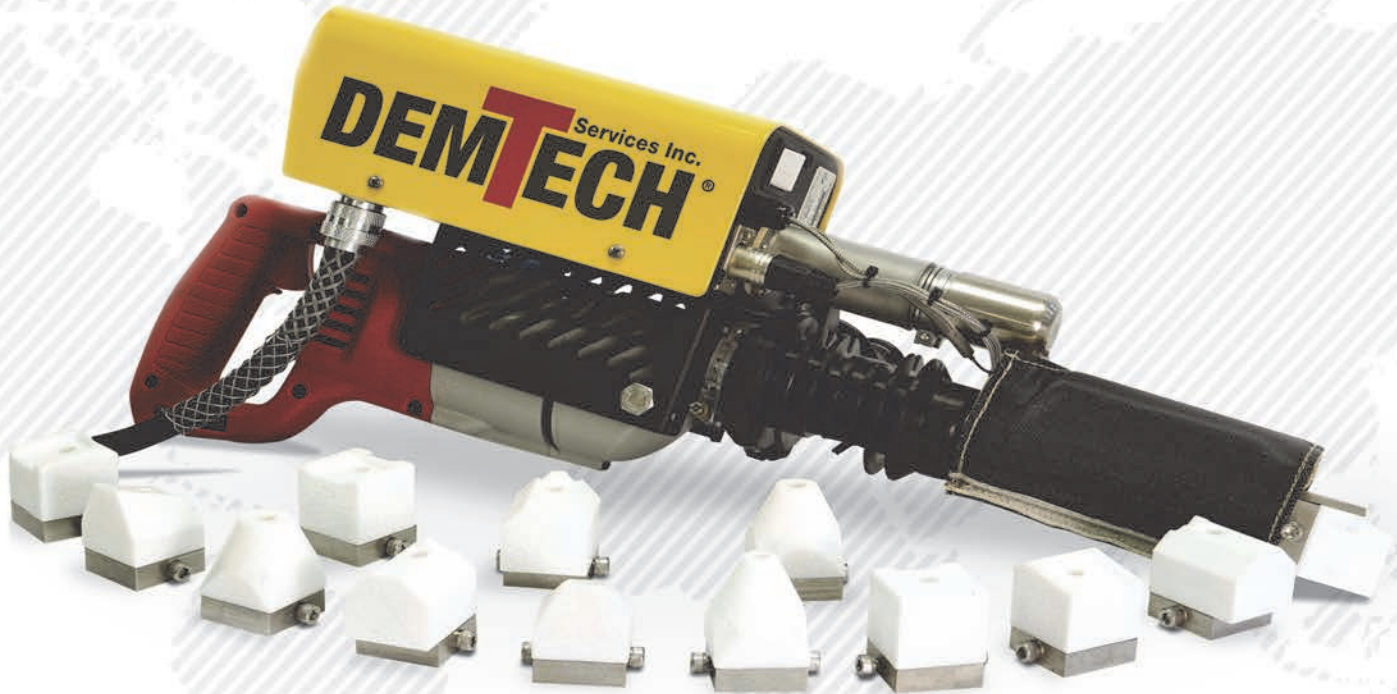

Long barrel reach for welding in tight places. Light weight for vertical and overhead applications.



Controls are easy to use and are protected from damage and accidental adjustment. Optional motor speed control to slow the welder for tight spots.



Bright LED headlights for better visibility in confined spaces and low light environments.

2 ea. Welding Shoes included.  
Custom models available upon request.  
Call for details. Specifications on reverse.

MADE IN THE  
**USA**

US & CANADIAN CUSTOMERS  
CONTACT US TODAY FOR  
INFORMATION ON A TEST DRIVE

# DEMTECH<sup>®</sup> Services Inc.

The **PRO-XMP** Extrusion Welder, manufactured by DEMTECH Services, Inc., is the latest in a long line of high quality extrusion welders for detail and medium production welding of thermoplastic liners, pipe, and rigid sheet stock as well as many other plastic welding applications. Drawing from many years of experience in the plastic welding industry, we've designed features and functions into its design to satisfy the needs of the most demanding welding technicians.

- Powerful Milwaukee brand drive motor well known for reliability.
- Reliable, easy to set Watlow temperature controllers.
- Easy to use heater on/off controls.
- Bright LED "headlights" light-up work area in front of teflon welding shoe.
- Electronic "cold start" protection prevents starting of motor before minimum operating temperature is reached.
- Demtech's exclusive integral pre-heat air blower heating system. Not just a hot air welder mounted on top.
- Small diameter but long barrel/pre-heat design for easy welding access to tight spaces.
- Ergonomic handle adjusts easily with a "twist" to different positions for right handed or left handed operation.
- Handle doubles as a "kick stand," making it nearly impossible to tip welder over. No separate stand needed.
- Non-twisting rod feed design makes it easier to manage welding rod. Works with 4 or 5mm rod.
- Welding shoes are available in Demtech's pre-machined design or "blanks".
- Welding shoe rotates 360° to weld in any direction
- Lightweight... Reliable... Affordable..

## Pro-XMP Medium Output Extrusion Welder

### TECHNICAL SPECIFICATIONS

Part Number	<b>PX-13007</b>
Weight (welder only)	<b>18 lbs. (3.1 kilos)</b>
Shipping Weight	<b>44 lbs. (20 kilos)</b>
Dimensions (welder only)	<b>30 X 15 X 13" (76.2 X 38 X 33cm)</b>
Welding Rod Size	<b>4 or 5 mm</b>
Output w/4mm Rod	<b>3.8 lbs. (1.7 kilos) per hour</b>
Output w/5mm Rod	<b>5 lbs. (2.3 kilos) per hour</b>
Material Range	<b>HDPE, LLDPE, PVDF, PE, PP, PVC</b>
Welding Range	<b>20 mil to 2" (.5 to 50 mm) thickness</b>
Operating Voltage	<b>230VAC, single phase</b>
Power Consumption	<b>2975W, 13 Amps</b>
Packaging	<b>Sturdy molded case w/ foam insert</b>

